


## Sechskantmuttern

## DIN 934 / ISO 4032

☞ Optional: Edelstahl A4 -ES4A

| Typ Stahl 8<br>verzinkt | Typ Edelstahl<br>A2 | D    | M    | S   | Typ Stahl 8<br>verzinkt | Typ Edelstahl<br>A2 | D    | M  | S  |
|-------------------------|---------------------|------|------|-----|-------------------------|---------------------|------|----|----|
| 934-M3                  | 934-M3 ES           | M 3  | 2,4  | 5,5 | 934-M24                 | 934-M24 ES          | M 24 | 19 | 36 |
| 934-M4                  | 934-M4 ES           | M 4  | 3,2  | 7   | 934-M27                 | 934-M27 ES          | M 27 | 22 | 41 |
| 934-M5                  | 934-M5 ES           | M 5  | 4,0  | 8   | 934-M30                 | 934-M30 ES          | M 30 | 24 | 46 |
| 934-M6                  | 934-M6 ES           | M 6  | 5,0  | 10  | 934-M33                 | 934-M33 ES          | M 33 | 26 | 50 |
| 934-M8                  | 934-M8 ES           | M 8  | 6,5  | 13  | 934-M36                 | 934-M36 ES          | M 36 | 29 | 55 |
| 934-M10                 | 934-M10 ES          | M 10 | 8,0  | 17  | 934-M39                 | ---                 | M 39 | 31 | 60 |
| 934-M12                 | 934-M12 ES          | M 12 | 10,0 | 19  | 934-M42                 | ---                 | M 42 | 34 | 65 |
| 934-M14                 | 934-M14 ES          | M 14 | 11,0 | 22  | 934-M45                 | ---                 | M 45 | 36 | 70 |
| 934-M16                 | 934-M16 ES          | M 16 | 13,0 | 24  | 934-M48                 | ---                 | M 48 | 38 | 75 |
| 934-M18                 | 934-M18 ES          | M 18 | 15,0 | 27  | 934-M56                 | ---                 | M 56 | 45 | 85 |
| 934-M20                 | 934-M20 ES          | M 20 | 16,0 | 30  | 934-M60                 | ---                 | M 60 | 48 | 90 |
| 934-M22                 | 934-M22 ES          | M 22 | 18,0 | 32  |                         |                     |      |    |    |

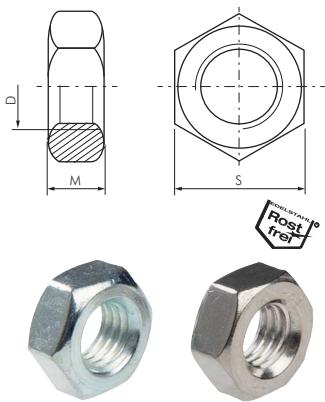

☞ Bestellbeispiel: 934-M3 \*\*

Standardtyp


Kennzeichen der Optionen:  
Edelstahl A4 ..... -ES4A

## Sechskantmuttern, niedrig, Form B (mit Fasen)

## DIN 439 / ISO 4035 / ISO 8675

☞ Optional: Edelstahl A4 -ES4A, Linksgewinde -LH

| Typ Stahl 4<br>verzinkt                | Typ Edelstahl<br>A2 | D         | Gewinde-<br>steigung | M    | S            |
|--|---------------------|-----------|----------------------|------|--------------|
| <b>Regelgewinde DIN 439 / ISO 4035</b> |                     |           |                      |      |              |
| 439-M3                                 | 439-M3 ES           | M 3       | 0,5                  | 1,8  | 5,5          |
| 439-M4                                 | 439-M4 ES           | M 4       | 0,7                  | 2,2  | 7            |
| 439-M5                                 | 439-M5 ES           | M 5       | 0,8                  | 2,7  | 8            |
| 439-M6                                 | 439-M6 ES           | M 6       | 1,0                  | 3,2  | 10           |
| 439-M8                                 | 439-M8 ES           | M 8       | 1,25                 | 4,0  | 13           |
| 439-M10                                | 439-M10 ES          | M 10      | 1,5                  | 5,0  | 17 (ISO: 16) |
| 439-M12                                | 439-M12 ES          | M 12      | 1,75                 | 6,0  | 19 (ISO: 18) |
| 439-M14                                | 439-M14 ES          | M 14      | 2,0                  | 7,0  | 22 (ISO: 21) |
| 439-M16                                | 439-M16 ES          | M 16      | 2,0                  | 8,0  | 24           |
| 439-M18                                | 439-M18 ES          | M 18      | 2,5                  | 9,0  | 27           |
| 439-M20                                | 439-M20 ES          | M 20      | 2,5                  | 10,0 | 30           |
| 439-M22                                | 439-M22 ES          | M 22      | 2,5                  | 11,0 | 32 (ISO: 34) |
| 439-M24                                | 439-M24 ES          | M 24      | 3,0                  | 12,0 | 36           |
| 439-M27                                | 439-M27 ES          | M 27      | 3,0                  | 13,5 | 41           |
| 439-M30                                | 439-M30 ES          | M 30      | 3,5                  | 15,0 | 46           |
| <b>Feingewinde DIN 439 / ISO 8675</b>  |                     |           |                      |      |              |
| 439-M8x1                               | 439-M8x1 ES         | M 8x1     | 1,0                  | 4,0  | 13           |
| 439-M10x1                              | 439-M10x1 ES        | M 10x1    | 1,0                  | 5,0  | 17 (ISO: 16) |
| 439-M10x1,25                           | 439-M10x1,25 ES     | M 10x1,25 | 1,25                 | 5,0  | 17 (ISO: 16) |
| 439-M12x1                              | 439-M12x1 ES        | M 12x1    | 1,0                  | 6,0  | 19 (ISO: 18) |
| 439-M12x1,25                           | 439-M12x1,25 ES     | M 12x1,25 | 1,25                 | 6,0  | 19 (ISO: 18) |
| 439-M12x1,5                            | 439-M12x1,5 ES      | M 12x1,5  | 1,5                  | 6,0  | 19 (ISO: 18) |
| 439-M14x1,5                            | 439-M14x1,5 ES      | M 14x1,5  | 1,5                  | 7,0  | 22 (ISO: 21) |
| 439-M16x1,5                            | 439-M16x1,5 ES      | M 16x1,5  | 1,5                  | 8,0  | 24           |
| 439-M18x1                              | 439-M18x1 ES        | M 18x1    | 1,0                  | 9,0  | 27           |
| 439-M18x1,5                            | 439-M18x1,5 ES      | M 18x1,5  | 1,5                  | 9,0  | 27           |
| 439-M20x1,5                            | 439-M20x1,5 ES      | M 20x1,5  | 1,5                  | 10,0 | 30           |
| 439-M22x1,5                            | 439-M22x1,5 ES      | M 22x1,5  | 1,5                  | 11,0 | 32 (ISO: 34) |
| 439-M24x1,5                            | 439-M24x1,5 ES      | M 24x1,5  | 1,5                  | 12,0 | 36           |
| 439-M24x2                              | 439-M24x2 ES        | M 24x2    | 2,0                  | 12,0 | 36           |
| 439-M27x2                              | 439-M27x2 ES        | M 27x2    | 2,0                  | 13,5 | 41           |
| 439-M30x1,5                            | 439-M30x1,5 ES      | M 30x1,5  | 1,5                  | 15,0 | 46           |
| 439-M30x2                              | 439-M30x2 ES        | M 30x2    | 2,0                  | 15,0 | 46           |
| 439-M36x2                              | 439-M36x2 ES        | M 36x2    | 2,0                  | 18,0 | 55           |

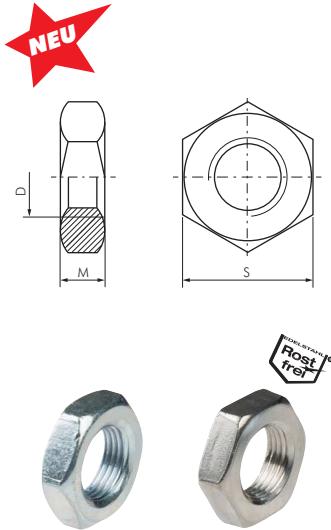

☞ Bestellbeispiel: 439-M3 \*\*

Standardtyp

Kennzeichen der Optionen:  
Edelstahl A4 ..... -ES4A  
Linksgewinde ..... -LH

